

# BROCADE FCX SERIES SWITCHES



## ENTERPRISE LAN SWITCHING

## Enterprise-Class Stackable Switches for the Network Edge

### HIGHLIGHTS

- Enterprise-class stackable Layer 2/3 edge switches with 24 or 48 10/100/1000 Mbps ports in compact 1U form factors
- Brocade stacking technology that provides chassis-like capabilities with the economical value of a fixed-port solution
- Expandable up to 384 ports through vertical or horizontal stacking
- High-availability stacking with hitless failover and hot insertion/removal of stacked units
- Layer 3 capabilities—including OSPF, RIP, VRRP, and PIM—come standard on all models
- Modular design with internal redundant hot-swappable power supplies and fans
- Hardware-based sFlow traffic monitoring
- Protected by the Brocade Assurance Limited Lifetime Warranty

The Brocade One™ strategy helps simplify networking infrastructures through innovative technologies and solutions. The Brocade FCX Series supports this strategy by enabling non-stop network access to today's mission-critical applications with the best price/performance while ensuring scalability for tomorrow's needs.

The Brocade® FCX Series of switches provides new levels of performance, scalability, and flexibility required for today's enterprise campus and data center networks. With advanced capabilities, these switches deliver performance and intelligence to the network edge in a flexible 1U form factor that helps reduce infrastructure and administrative costs.

Designed for wire-speed and non-blocking performance, the Brocade FCX Series includes 24- and 48-port models, in both Power over Ethernet (PoE) and non-PoE versions. Utilizing Brocade IronStack technology, organizations can stack up to

eight switches into a single logical switch with up to 384 ports.

The Brocade FCX Series offers a comprehensive line of switches with specific models optimized for campus and data center deployments.

### BUILT FOR NEXT-GENERATION ENTERPRISE NETWORKS


The Brocade FCX Series can deliver both power and data across network connections, providing a single-cable solution for edge devices such as Voice over IP (VoIP) phones, video surveillance



# BROCADE

**Figure 1.**

Brocade FCX Series switches can be stacked into a single logical switch and then redundantly connected to the aggregation layer using aggregated 10 GbE ports.

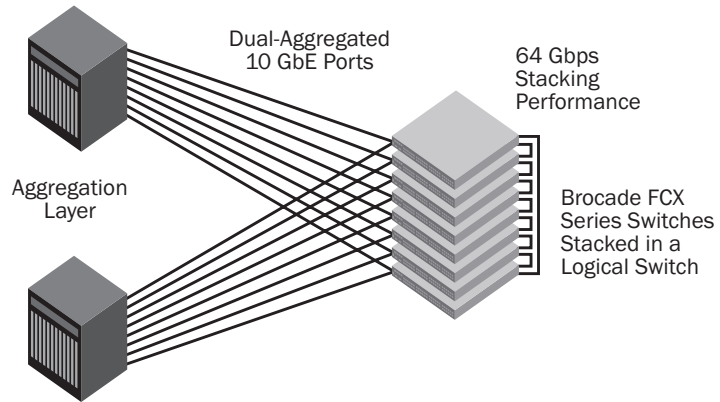

## POWER OVER ETHERNET PLUS

In 2003, PoE became a standard with the approval of IEEE 802.3af, eliminating the need to have separate LAN cables for data and electrical cables for power. Class 3 PoE switches can deliver up to 15.4 watts of power across each port, providing converged power and data to devices such as VoIP phones, surveillance cameras, and wireless access points.

While 15.4 watts of power is sufficient for many devices, PoE+ is an emerging standard (802.3at) that leverages modern CAT5e cabling to provide 30 watts of power per port—enabling higher-powered next-generation campus convergence devices such as wireless 802.11n access points, video conferencing phones, and pan/tilt surveillance cameras. Moreover, PoE+ is backward compatible with 802.3af PoE, and Brocade FCX Series switches can use LLDP to negotiate port settings dynamically.

cameras, and wireless access points.

The switches are compatible with industry-standard VoIP equipment as well as legacy IP phones.

These switches support the emerging PoE Plus (PoE+) standard (802.3at) to provide up to 30 watts of power to each device. This high-powered solution simplifies wiring for next-generation solutions such as video conferencing phones, pan/tilt surveillance cameras, and 802.11n wireless access points. The PoE capability reduces the number of power receptacles and power adapters while increasing reliability and wiring flexibility.

The 24-port Brocade FCX PoE model can supply full Class 3 (15.4 watts) or full PoE+ (30 watts) power to every port, and the 48-port model can supply full Class 3 power to every port or full PoE+ power to 26 ports. The switches can power a combination of PoE and PoE+ devices while staying within the switches' 820-watt power budget.

## Plug-and-Play Operations for Powered Devices

The Brocade FCX Series supports the IEEE 802.1AB Link Layer Discovery Protocol (LLDP) and ANSI TIA 1057 Link Layer Discovery Protocol-Media Endpoint Discovery (LLDP-MED) standards that enable organizations to deploy interoperable multivendor solutions for Unified Communications (UC).

Configuring IP endpoints such as VoIP phones can be a complex task requiring manual and time-consuming configuration. LLDP and LLDP-MED address this challenge, providing a standard, open method for configuring, discovering, and managing network infrastructure. The LLDP protocols help reduce operational costs by simplifying and automating network

operations. For example, LLDP-MED provides an open protocol for configuring Quality of Service (QoS), security policies, Virtual LAN (VLAN) assignments, PoE power levels, and service priorities.

## INCREASED FLEXIBILITY AND SCALABILITY

The Brocade FCX Series provides a wide range of flexibility and scalability advantages for dynamic and growing enterprise networks.

## Simplified, High-Performance, High-Availability Stacking

Leveraging Brocade IronStack technology, up to eight Brocade FCX Series switches can be stacked into a single logical switch, providing simple and robust expandability for future growth at the network edge. This stacked switch has only a single IP address to simplify management. When new members are added to the stack, they automatically inherit the stack's existing configuration file, enabling true plug-and-play network expansion.

Brocade stacking technology delivers high availability, performing real-time state synchronization across the stack and enabling instantaneous hitless failover to a standby controller, if the master stack controller fails. In addition, organizations can use hot-insertion/removal of stack members to avoid interrupting service.

Brocade FCX-S switch models offer two dedicated full-duplex 16 Gbps stacking ports that provide 64 Gbps of stacking bandwidth, essentially eliminating the need to work around inter-switch bottlenecks (see Figure 1). These dedicated stacking ports free up the 10 Gigabit Ethernet (GbE) ports for high-speed connectivity to the aggregation or core layers—providing



**Figure 2.**

Brocade FCX 624 and Brocade FCX 648 switch models feature reversible front-to-back airflow, internal redundant hot-swappable power supplies, and a swappable fan assembly.

maximum flexibility in a compact access switch. Additionally, all Brocade FCX Series switches can be stacked through their optional 10 GbE ports.

The 10 GbE ports can also be trunked from different members of the stack to optimize performance and availability. For added flexibility, IronStack also supports the use of 10 GbE ports with fiber-optic cabling for stacking across racks, floors, and buildings.

#### **Optional 10 GbE Module**

Brocade FCX-S switch models accept an optional 10 GbE module containing two XFP ports, enabling high-bandwidth connectivity to the aggregation or core layers, or extended switch stacking across long distances. Up to eight 10 GbE links can be aggregated in a stack, providing 80 Gbps of bandwidth between the wiring closet and the aggregation layer.

#### **Brocade FCX Series Models with Four Optional 10 GbE Uplinks**

Brocade FCX 624 and Brocade FCX 648 switch models accept an optional 10 GbE module containing four Small Form-Factor Pluggable (SFP+) ports, enabling high-bandwidth connectivity to the aggregation or core layers, or creating a switch stack horizontally across a row of servers. Utilizing the SFP+ port form factor enables higher density, more flexible cabling options, and

better energy efficiency. The ability to use short-range and long-range optics, along with copper Twinax cables, supports flexible and cost-effective network architectures.

Industry-leading 4-port 10 GbE density in a 1U switch provides up to 40 Gbps of uplink bandwidth to the aggregation or core layers of the network. Even with the high-density 48-port model, this bandwidth enables a near 1:1 subscription ratio throughout the network. As a result, organizations can deploy highly utilized networks to avoid congestion during peak hours.

#### **Flexible Cooling Options**

The Brocade FCX 624 and Brocade FCX 648 are the first Brocade Ethernet switches with reversible front-to-back airflow options. This design improves mounting flexibility in server racks, while adhering to the cooling guidelines of the data center. Organizations can specify airflow direction at the time of order and can reverse the direction after deployment by swapping the power supplies and the fan assembly.

#### **REDUCED POWER CONSUMPTION**

In today's rapidly growing business environments, organizations need to minimize power consumption throughout the entire IT infrastructure. The Brocade FCX Series is designed to intelligently manage power usage, extending "green" initiatives to the wiring closet.

Power to connected devices is automatically negotiated using the LLDP-MED protocol, providing the powered devices with exactly the amount of power they need. If devices go into sleep mode, they can request less power from the network, minimizing power usage in the campus environment. At as low as 1.22 watts/Gbps for non-PoE models and 1.41 watts/Gbps for PoE models, Brocade FCX Series switches consume minimal power for the performance and functionality they provide.

#### **HIGH RELIABILITY IN A COMPACT FORM FACTOR**

In addition to stack-level high-availability capabilities such as hitless failover and hot insertion and removal of stacked units, Brocade FCX Series switches include system-level high-availability features such as optional dual hot-swappable, load-sharing, redundant power supplies (see Figures 2 and 3). The modular design also has a removable fan assembly. These features provide another level of availability for the campus wiring closet and the data center in a compact form factor.

Additional design features include intake and exhaust temperature sensors and fan spin detection to aid in fast identification of abnormal or failed operating conditions to help minimize mean time to repair.

#### **COMPREHENSIVE ENTERPRISE-CLASS SECURITY**

The Brocade FCX Series utilizes the Brocade IronWare operating system, providing a rich security suite for Layer 2 and Layer 3 services, Network Access Control (NAC), and Denial of Service (DoS) protection. IronWare security features include protection against TCP SYN and ICMP DoS attacks; Spanning Tree Root Guard and BPDU Guard to protect network



**Figure 3.**

Brocade FCX-S switch models feature internal redundant hot-swappable power supplies and a swappable fan assembly, in addition to dedicated stacking ports and a rear-facing out-of-band management port.

spanning tree operations; and broadcast and multicast packet rate limiting. Additional security features include dynamic ARP inspection, DHCP snooping, and IP source guard to protect against address spoofing and man-in-the middle attacks.

### **Network Access Control (NAC)**

Organizations can rely on key features such as multi-device port authentication and 802.1X authentication with dynamic policy assignment to control network access and perform targeted authorization on a per-user level. In addition, the Brocade FCX Series supports enhanced Media Access Control (MAC) policies with the ability to deny traffic to and from MAC addresses on a per-VLAN basis. This powerful tool helps organizations control access policies per endpoint device.

Standards-based NAC also facilitates best-in-class solutions for authenticating network users and validating the security posture of connecting devices. Support for policy-controlled MAC-based VLANs provides additional control of network access, enabling policy-controlled assignment of devices to Layer 2 VLANs.

### **Traffic Monitoring and Lawful Intercept**

Organizations might need to set up lawful traffic intercept due to today's heightened security environment. For example, in the United States, the Communications Assistance for Law Enforcement Act (CALEA) requires organizations to be able to intercept and replicate data traffic directed to a particular user, subnet, port, and so on. This capability is particularly essential in networks implementing VoIP phones. Brocade FCX Series switches provide the capability to meet this requirement through Access Control List (ACL)-based mirroring, MAC filter-based mirroring, and VLAN-based mirroring.

### **Fiber to the Desktop for Security-Sensitive Applications**

The Brocade FCX 624S-F provides 24 SFP 100/1000 Mbps fiber-optic ports for government and military network initiatives or for applications requiring additional security and resiliency. For these types of network environments, fiber-optic cable is the ultimate transmission medium,

because it does not emit electromagnetic signals that can be intercepted. And, unlike copper wires, optical fiber cannot be tapped without detection. Fiber-optic network links are also immune to Radio Frequency Interference (RFI) and Electro-Magnetic Interference (EMI).

### **Threat Detection and Mitigation**

The Brocade FCX Series utilizes embedded hardware-based sFlow traffic sampling to extend Brocade IronShield 360 security to the network edge. This unique and powerful closed-loop threat mitigation solution uses best-in-class intrusion detection systems to inspect traffic samples for possible network attacks. In response to a detected attack, Brocade Network Advisor can automatically apply a security policy to the compromised port, stopping network attacks in real time without administrator intervention.

### **Advanced Multicast Features**

The Brocade FCX Series supports a rich set of Layer 2 multicast snooping features that enable advanced multicast services delivery. Internet Group Management Protocol (IGMP) snooping for IGMP version 1, 2, and 3 is supported. Support for IGMPv3 source-based multicast snooping improves bandwidth utilization and security for multicast services. To enable multicast services delivery in IPv6 networks, the Brocade FCX Series supports Multicast Listener Discovery (MLD) version 1 and 2 snooping—the multicast protocols used in IPv6 environments.

### **NETWORK RESILIENCY THROUGH FAULT DETECTION**

Software features such as Virtual Switch Redundancy Protocol (VSRP), Brocade Metro-Ring Protocol (MRP) v1 and v2, Rapid Spanning Tree Protocol (RSTP), protected link groups, 802.3ad Link Aggregation, and trunk groups provide alternate paths for traffic in the event of a link failure. Sub-second fault detection utilizing Link Fault Signaling (LFS) and Remote Fault Notification (RFN) helps ensure fast fault detection and recovery.

Enhanced spanning tree features such as Root Guard and BPDU Guard prevent rogue hijacking of a spanning tree root and maintain a contention- and loop-free

environment, especially during dynamic network deployments. In addition, the Brocade FCX Series supports port-loop detection on edge ports that do not have spanning tree enabled. This capability protects the network from broadcast storms and other anomalies that can result from Layer 1 or Layer 2 loopbacks on Ethernet cables or endpoints.

Protected link groups minimize disruption to the network by protecting critical links from loss of data and power. In a protected link group, one port in the group acts as the primary or active link, and the other ports act as secondary or standby links. The active link carries the traffic and, if it goes down, one of the standby links takes over.

UniDirectional Link Detection (UDLD) monitors a link between two Brocade FCX Series switches and brings down the ports on both ends of the link if the link fails at any point between the two devices.

The Brocade FCX Series also supports stability features such as port flap dampening, single-link Link Aggregation Control Protocol (LACP), and port loop detection.

### **ADVANCED CAPABILITIES**

To meet a wide range of requirements, the Brocade FCX Series provides full Layer 3 capabilities, along with metro features for connecting buildings and campuses.

#### **Full Layer 3 Capabilities**

All Brocade FCX switches come standard with powerful Layer 3 switching capabilities. Organizations can use Layer 3 features such as IPv4 OSPF and RIP routing, policy-based routing, VRRP, and Protocol-Independent Multicast (PIM) to reduce complexity and enhance the reliability of large enterprise networks by bringing Layer 3 capabilities to the network edge.

Advanced (-ADV) models include BGP routing capabilities, enabling remote offices to connect Brocade FCX Series switches to service provider networks. BGP routing can also be added to any Brocade FCX Series switch model through software key-based activation.

## **Metro Features Connecting Buildings and Campuses**

Because Brocade FCX Series switches include Metropolitan Area Network (MAN) features, organizations can use them to connect a distributed enterprise. In this type of environment, Brocade FCX Series switches provide rich services using MRP (v1 and v2) for building resilient ring-based topologies, VLAN stacking (Q-in-Q), and advanced multicast capabilities—including IGMP v1/v2/v3 and Multicast Listener Discovery (MLD) v1/v2 snooping for controlling multicast traffic for high-bandwidth content delivery.

## **SIMPLIFIED, SECURE MANAGEMENT BASED ON OPEN STANDARDS**

The Brocade FCX Series provides simplified, standards-based management capabilities that help organizations reduce administrative time and effort while securing their networks.

## **Simplified Deployment with Auto-Configuration**

The Brocade FCX Series supports auto-configuration, simplifying deployment with a truly plug-and-play experience. Organizations can use this feature to automate IP address and feature configuration of the switches without requiring a highly trained network engineer onsite. When the switches power up, they automatically receive an IP address and configuration from DHCP and Trivial File Transport Protocol (TFTP) servers. At this time, the switches can also automatically receive a software update to be at the same code revision as already installed switches.

## **Open-Standards Management**

The Brocade FCX Series includes an industry-standard Command Line Interface (CLI) and supports Secure Shell (SSHv2), Secure Copy (SCP), and SNMPv3 to restrict and encrypt management communications to the system. In addition, support for Terminal Access Controller Access Control System (TACACS/TACACS+) and RADIUS authentication helps ensure secure operator access.

## **Out-of-Band Management**

The Brocade FCX Series includes an RJ-45 Ethernet port dedicated to out-of-band management, providing a remote path to manage the switches, regardless of the status or configuration of the data ports.

## **UNIFIED WIRED/WIRELESS NETWORK MANAGEMENT WITH BROCADE NETWORK ADVISOR**

Managing enterprise campus networks continues to become more complex due to the growth in services that rely on wired and wireless networks. Services such as Internet, e-mail, video conferencing, real-time collaboration, and distance learning all have specific configuration and management requirements. At the same time, organizations face increasing demand to provide uninterrupted services for high-quality voice and UC, wireless mobility, and multimedia applications.

To reduce complexity and the time spent managing these environments, the easy-to-use Brocade Network Advisor discovers, manages, and deploys configurations to groups of IP devices. By using the Brocade Network Advisor Device Configuration Manager tool, organizations can configure VLANs within the network, manage wireless access point realms, or execute CLI commands on specific IP devices or groups of IP devices. sFlow-based proactive monitoring is ideal for performing network-wide troubleshooting, generating traffic reports, and gaining visibility into network activity from the edge to the core. Brocade Network Advisor centralizes management of the entire family of Brocade wired and wireless products, including the Brocade FCX Series.

## **BROCADE GLOBAL SERVICES**

Leveraging 15 years of expertise in storage, networking, and virtualization, Brocade Global Services enables organizations to maximize their Brocade investments, accelerate new technology deployments, and optimize the performance of networking infrastructures. Brocade Global Services

delivers world-class professional services, 24×7 access to technical support—including optics coverage, software fixes, and new releases—and education services.

## **WARRANTY**

The Brocade FCX Series is covered by the Brocade Assurance™ Limited Lifetime Warranty for as long as the original purchaser continues to own and use the product. The warranty covers the product hardware, including internal power supplies and internal fans, as well as software defect repairs. To streamline the product replacement process, qualified customers can directly access the MyBrocade™ Portal to initiate advanced replacement on registered products.

## **CLOUD-OPTIMIZED NETWORK ACQUISITION**

Brocade helps organizations easily address their information technology requirements by offering flexible network acquisition and support alternatives to meet their financial needs. Organizations can select from purchase, lease, and Brocade Network Subscription options to align network acquisition with their unique capital requirements and risk profiles.

## **MAXIMIZING INVESTMENTS**

To help optimize technology investments, Brocade and its partners offer complete solutions that include professional services, technical support, and education. For more information, contact a Brocade sales partner or visit [www.brocade.com](http://www.brocade.com).

## BROCADE FASTIRON CX SERIES FEATURE COMPARISON

	BROCADE FCX		BROCADE FCX-S (Dedicated Stacking Ports)				
	FCX 624	FCX 648	FCX 624S	FCX 648S	FCX 624S-F	FCX 624S-HPOE	FCX 648S-HPOE
Switching bandwidth (data rate, full duplex)	128 Gbps	176 Gbps	152 Gbps	200 Gbps	152 Gbps	152 Gbps	200 Gbps
Forwarding bandwidth (data rate, full duplex)	96 Mpps	132 Mpps	114 Mpps	150 Mpps	114 Mpps	114 Mpps	150 Mpps
Stacking bandwidth (data rate, full duplex)	40 Gbps (with optional 10 GbE ports)	40 Gbps (with optional 10 GbE ports)	64 Gbps	64 Gbps	64 Gbps	64 Gbps	64 Gbps
10/100/1000 Mbps RJ-45 ports	24	48	24	48	N/A	24	48
100/1000 Mbps SFP ports	N/A	N/A	N/A	N/A	20	N/A	N/A
1000 Mbps combo ports	4 (optional)	4 (optional)	4	4	4	4	4
10 Gigabit Ethernet ports	4 SFP+ (optional)	4 SFP+ (optional)	2 XFP (optional)	2 XFP (optional)	2 XFP (optional)	2 XFP (optional)	2 XFP (optional)
16 Gbps CX4 stacking ports	N/A	N/A	2	2	2	2	2
Maximum PoE Class 3 ports	N/A	N/A	N/A	N/A	N/A	24	48 (two power supplies)
Maximum PoE+ ports	N/A	N/A	N/A	N/A	N/A	24 (two power supplies)	26 (two power supplies)
Internal power supplies	2×210 W removable (second optional)	2×210 W removable (second optional)	2×210 W removable (second optional)	2×210 W removable (second optional)	2×210 W removable (second optional)	2×620 W removable (second optional)	2×620 W removable (second optional)
<b>Optional FRUs</b>							
1000 Mbps combo module	FCX-4G	FCX-4G	N/A	N/A	N/A	N/A	N/A
10 Gigabit Ethernet module	FCX-4XG	FCX-4XG	FCX-2XG	FCX-2XG	FCX-2XG	FCX-2XG	FCX-2XG
Second power supply	RPS13/ RPS13-I	RPS13/ RPS13-I	RPS13	RPS13	RPS13	RPS14	RPS14
Replacement fan unit	FCX-FAN-E/ FCX-FAN-I	FCX-FAN-E/ FCX-FAN-I	FCX-S-FAN	FCX-S-FAN	FCX-S-FAN	FCX-S-POE-FAN	FCX-S-POE-FAN
Advanced Layer 3 software upgrade adds BGP	FCX-ADV- LIC-SW	FCX-ADV- LIC-SW	FCX-ADV- LIC-SW	FCX-ADV- LIC-SW	FCX-ADV- LIC-SW	FCX-ADV- LIC-SW	FCX-ADV- LIC-SW

## BROCADE FCX SERIES SPECIFICATIONS

System Architecture		IEEE standards compliance
Connector options	10/100/1000 Mbps ports: RJ-45 (fixed) 1 Gbps SFP combo ports: SX, LX, LHA, LHB, 1000Base-BX, CWDM 10 Gbps XFP ports: 1310-MM, SR, LR, ER, ZR, ZRD 10 Gbps SFP+ ports: Direct-Attached Copper (Twinax), SR, LR Stacking ports: fixed CX4 (fixed) Out-of-band Ethernet management: RJ-45 (fixed) Console management: DB9	<ul style="list-style-type: none"> <li>• 802.1AB LLDP/LLDP-MED</li> <li>• 802.1D-2004 MAC Bridging</li> <li>• 802.1p Mapping to Priority Queue</li> <li>• 802.1s Multiple Spanning Tree</li> <li>• 802.1w Rapid Spanning Tree</li> <li>• 802.1x Port-based Network Access Control</li> <li>• 802.3 10 Base-T</li> <li>• 802.3ab 1000 Base-T</li> <li>• 802.3ad Link Aggregation (Dynamic and Static)</li> <li>• 802.3ae 10 Gigabit Ethernet</li> <li>• 802.3af Power over Ethernet</li> <li>• 802.3ak CX4</li> <li>• 802.3u 100 Base-TX</li> <li>• 802.3x Flow Control</li> <li>• 802.3z 1000Base-SX/LX</li> <li>• 802.3 MAU MIB (RFC 2239)</li> </ul>
Maximum MAC addresses	32,000	
Maximum VLANs	4096	
Maximum STP (spanning trees)	255	
Maximum routes (in hardware)	16,000	
Trunking	Maximum ports per trunk: 8 Maximum trunk groups: 59	
Maximum jumbo frame size	9000 bytes	

Layer 2 switching	<ul style="list-style-type: none"> <li>• 802.1s Multiple Spanning Tree</li> <li>• 802.1x Authentication</li> <li>• Auto MDI/MDIX</li> <li>• BPDU Guard, Root Guard</li> <li>• Dual-Mode VLANs</li> <li>• Dynamic VLAN Assignment</li> <li>• Dynamic Voice VLAN Assignment</li> <li>• Fast Port Span</li> <li>• Flexible Static Multicast MAC Address Configuration</li> <li>• GARP VLAN Registration Protocol</li> <li>• IGMP Snooping (v1/v2/v3)</li> <li>• Link Fault Signaling (LFS)</li> <li>• MAC Address Locking</li> <li>• MAC-Layer Filtering</li> <li>• MAC Learning Disable; Port Security</li> <li>• MLD Snooping (v1/v2)</li> <li>• Multi-device Authentication</li> <li>• Per VLAN Spanning Tree (PVST/PVST+/PVRST)</li> <li>• PIM-SM Snooping</li> <li>• Policy-controlled MAC-based VLANs</li> <li>• Port-based Access Control Lists</li> <li>• Port-based, ACL-based, MAC Filter-based, and VLAN-based Mirroring</li> <li>• Port Loop Detection</li> <li>• Port Speed Downshift and Selective Auto-negotiation</li> <li>• Private VLAN</li> <li>• Private VLANs and Uplink Switch</li> <li>• Protected Link Groups</li> <li>• Protocol VLAN (802.1v), Subnet VLAN</li> <li>• Remote Fault Notification (RFN)</li> <li>• Single-instance Spanning Tree</li> <li>• Single-link LACP</li> <li>• Trunk Groups</li> <li>• Trunk Threshold</li> <li>• UniDirectional Link Detection (UDLD)</li> </ul>	High availability	<ul style="list-style-type: none"> <li>• Redundant hot-swappable internal power supplies</li> <li>• Hot-swappable fan assembly</li> <li>• Layer 3 VRRP protocol redundancy</li> <li>• Real-time state synchronization across the stack</li> <li>• Hitless failover from master to standby stack controller</li> <li>• Protected link groups</li> <li>• Hot insertion and removal of stacked units</li> </ul>
		Traffic management	<ul style="list-style-type: none"> <li>• ACL-based inbound rate limiting and traffic policies</li> <li>• Broadcast, multicast, and unknown unicast rate limiting</li> <li>• Inbound rate limiting per port</li> <li>• Outbound rate limiting per port and per queue</li> </ul>
<b>Management</b>			
		Management and control	<ul style="list-style-type: none"> <li>• Auto Configuration</li> <li>• Configuration Logging</li> <li>• Digital Optical Monitoring</li> <li>• Display Log Messages on Multiple Terminals</li> <li>• Embedded Web Management</li> <li>• Embedded DHCP Server</li> <li>• Foundry Discovery Protocol (FDP)</li> <li>• Industry-Standard Command Line Interface (CLI)</li> <li>• Key-based activation of optional software features</li> <li>• Integration with HP OpenView for Sun Solaris, HP-UX, IBM AIX, and Windows</li> <li>• Brocade Network Advisor</li> <li>• IronView Network Manager (INM) Version 3.2 or later</li> <li>• MIB Support for MRP, Port Security, MAC Authentication, and MAC-based VLANs</li> <li>• Out-of-band Ethernet Management</li> <li>• RFC 783 TFTP</li> <li>• RFC 854 TELNET Client and Server</li> <li>• RFC 1157 SNMPv1/v2c</li> <li>• RFC 1213 MIB-II</li> <li>• RFC 1493 Bridge MIB</li> <li>• RFC 1516 Repeater MIB</li> <li>• RFC 1573 SNMP MIB II</li> <li>• RFC 1643 Ethernet Interface MIB</li> <li>• RFC 1643 Ethernet MIB</li> <li>• RFC 1724 RIP v1/v2 MIB</li> <li>• RFC 1757 RMON MIB</li> <li>• RFC 2068 Embedded HTTP</li> <li>• RFC 2131 DHCP Server and DHCP Relay</li> <li>• RFC 2570 SNMPv3 Intro to Framework</li> <li>• RFC 2571 Architecture for Describing SNMP Framework</li> <li>• RFC 2572 SNMP Message Processing and Dispatching</li> <li>• RFC 2573 SNMPv3 Applications</li> <li>• RFC 2574 SNMPv3 User-based Security Model</li> <li>• RFC 2575 SNMP View-based Access Control Model SNMP</li> <li>• RFC 2818 Embedded HTTPS</li> <li>• RFC 3176 sFlow</li> <li>• SNTP Simple Network Time Protocol</li> <li>• Support for Multiple Syslog Servers</li> </ul>
Layer 3 routing	<ul style="list-style-type: none"> <li>• ECMP</li> <li>• Host routes</li> <li>• IPv4 Static Routes</li> <li>• Layer 3/Layer 4 ACLs RIP v1/v2 announce</li> <li>• OSPF v2</li> <li>• PIM-SM, PIM-SSM, PIM-DM</li> <li>• RIP v1/v2</li> <li>• Routed Interfaces</li> <li>• Route-only Support</li> <li>• Routing Between Directly Connected Subnets</li> <li>• Virtual Interfaces</li> <li>• Virtual Route Redundancy Protocol (VRRP)</li> </ul>		
Advanced functionality (included with – ADV models)	<ul style="list-style-type: none"> <li>• BGP</li> </ul>		
Metro features	<ul style="list-style-type: none"> <li>• Metro-Ring Protocol (v1, v2)</li> <li>• Virtual Switch Redundancy Protocol (VSRP)</li> <li>• VLAN Stacking (Q-in-Q)</li> <li>• VRRP, VRRP-E</li> <li>• Topology Groups</li> </ul>		
Quality of service	<ul style="list-style-type: none"> <li>• ACL Mapping and Marking of ToS/DSCP</li> <li>• ACL Mapping to Priority Queue</li> <li>• ACL Mapping to ToS/DSCP</li> <li>• Classifying and Limiting Flows Based on TCP Flags</li> <li>• DHCP Relay</li> <li>• DiffServ Support</li> <li>• Honoring DSCP and 802.1p</li> <li>• MAC Address Mapping to Priority Queue</li> <li>• QoS Queue Management using Weighted Round Robin (WRR), Strict Priority (SP), and a combination of WRR and SP</li> </ul>		
		Embedded security	<ul style="list-style-type: none"> <li>• 802.x Accounting</li> <li>• MAC Authentication</li> <li>• Bi-level Access Mode (Standard and EXEC Level)</li> <li>• EAP pass-through support</li> <li>• IEEE 802.1X username export in sFlow</li> <li>• Protection against Denial of Service (DoS) attacks</li> </ul>
		Secure management	<ul style="list-style-type: none"> <li>• Authentication, Authorization, and Accounting (AAA)</li> <li>• Advanced Encryption Standard (AES) with SSHv2</li> <li>• RADIUS/TACACS/TACACS+</li> <li>• Secure Copy (SCP)</li> <li>• Secure Shell (SSHv2)</li> <li>• Username/Password</li> <li>• Web authentication</li> </ul>

Mechanical	
Enclosure	FCX 624, FCX 648: front-to-back airflow (reversible) FCX 624S, FCX 624S-F, FCX 648S, FCX 624S-HPOE, FCX 648S-HPOE: side-to-back airflow 1U, 19-inch EIA-compliant, power from non-port side
Size	FCX 624 and FCX 648 switch models: Width: 44.0 cm (17.3 in.) Height: 4.4 cm (1.7 in.) Depth: 43.5 cm (17.2 in.)  FCX 624S, FCX 624S-F, and FCX 648S switch models: Width: 44.0 cm (17.3 in.) Height: 4.4 cm (1.7 in.) Depth: 38.6 cm (15.2 in.)  FCX 624S-HPOE and FCX 648S-HPOE switch models: Width: 44.0 cm (17.3 in.) Height: 4.4 cm (1.7 in.) Depth: 44.0 cm (17.3 in.)
Weight	FCX 624: 5.35 kg (11.79 lb) FCX 648: 5.71 kg (12.59 lb) FCX 624S, FCX 624S-F, and FCX 648S switch models: 4.0 kg (8.8 lb) FCX 624S-HPOE and FCX 648S-HPOE switch models: 4.5 kg (9.9 lb)
Environment	
Temperature	Operating temperature: 32° to 104° F (0° to 45° C) Storage temperature: -23° to 158° F (-25° to 70° C)
Humidity	Relative humidity: 5% to 95%, non-condensing
Altitude	Storage altitude: 10,000 ft (3000 m) maximum
Acoustic	51 to 63 dB
Power	
Power supplies	Up to two internal, redundant, field-replaceable, load-sharing AC power supplies

Power inlet	C13
Input voltage	Typical 100 to 240 VAC
Input line frequency	50 to 60 Hz
Compliance/Certification	
Electromagnetic emissions	FCC Class A (Part 15); EN 55022/CISPR-22 Class A; VCCI Class A  ICES-003 Electromagnetic Emission; AS/NZS 55022; EN 61000-3-2 Power Line Harmonics; EN 61000-3-3 Voltage Fluctuation and Flicker; EN 61000-6-3 Emission Standard (Supersedes: EN 50081-1)
Safety	CAN/CSA-C22.2 No. 60950-1-3; UL 60950-1; IEC 60950-1; EN 60950-1 Safety of Information Technology Equipment; EN 60825-1 Safety of Laser Products—Part 1: Equipment Classification, Requirements and User's Guide; EN 60825-2 Safety of Laser Products—Part 2: Safety of Optical Fibre Communication Systems
Immunity	EN 61000-6-1 Generic Immunity and Susceptibility (this supersedes EN 50082-1); EN 55024 Immunity Characteristics (this supersedes EN 61000-4-2 ESD); EN 61000-4-3 Radiated, radio frequency, electromagnetic field; EN 61000-4-4 Electrical fast transient; EN 61000-4-5 Surge; EN 61000-4-6 Conducted disturbances induced by radio-frequency fields; EN 61000-4-8 Power frequency magnetic field; EN 61000-4-11 Voltage dips and sags
Environmental regulatory compliance	RoHS-compliant (6 of 6); WEEE-compliant

<sup>1</sup> With 4-port 10 GbE module installed and one power supply.

<sup>2</sup> Calculated using switch data rate.

<sup>3</sup> Total power drawn from the source and consumed by the switch and attached PoE devices. Class 3 devices assumed on all ports.

<sup>4</sup> Power drawn from the source and consumed only by the switch.

<sup>5</sup> Thermal output of the switch.

<sup>6</sup> With two power supplies installed.

## BROCADE FASTIRON CX SERIES POWER AND THERMAL SPECIFICATIONS

	Max Current at 100 VAC (Amps)	Max Current at 200 VAC (Amps)	Max Total Power Draw <sup>3</sup> (Watts)	Max System Power Draw <sup>2</sup> (Watts)	Max Thermal Output <sup>5</sup> (BTU/Hr)	Energy Efficiency (Watts/Gbps) <sup>2</sup>
FCX 624 <sup>1</sup>	0.9	0.6	92	92	312.8	1.4
FCX 648 <sup>1</sup>	1.2	0.7	112	112	421.6	1.3
FCX 624S	1.09	0.51	94	94	319	1.23
FCX 624S-F	1.00	0.58	102	102.1	348	1.34
FCX 648S	1.39	0.63	122	122	416	1.22
FCX 624S-HPOE <sup>6</sup>	1.09	0.58	509	107	365	1.41
FCX 648S-HPOE <sup>6</sup>	1.72	0.94	970	167	570	1.67

### Corporate Headquarters

San Jose, CA USA  
T: +1-408-333-8000  
info@brocade.com

### European Headquarters

Geneva, Switzerland  
T: +41-22-799-56-40  
emea-info@brocade.com

### Asia Pacific Headquarters

Singapore  
T: +65-6538-4700  
apac-info@brocade.com

© 2011 Brocade Communications Systems, Inc. All Rights Reserved. 08/11 GA-DS-1352-05

Brocade, the B-wing symbol, DCX, Fabric OS, and SAN Health are registered trademarks, and Brocade Assurance, Brocade NET Health, Brocade One, CloudPlex, MLX, VCS, VDX, and When the Mission Is Critical, the Network Is Brocade are trademarks of Brocade Communications Systems, Inc., in the United States and/or in other countries. Other brands, products, or service names mentioned are or may be trademarks or service marks of their respective owners.

Notice: This document is for informational purposes only and does not set forth any warranty, expressed or implied, concerning any equipment, equipment feature, or service offered or to be offered by Brocade. Brocade reserves the right to make changes to this document at any time, without notice, and assumes no responsibility for its use. This informational document describes features that may not be currently available. Contact a Brocade sales office for information on feature and product availability. Export of technical data contained in this document may require an export license from the United States government.



**BROCADE**